

Stafix® DOTS is a self-adhesive, PVC-free material that adheres bubble-free to various clean and smooth surfaces, using a nearly invisible, dot-patterned silicone adhesive layer.

STAFIX DOTS

Version 2024-1

Stafix® DOTS Product datasheet

- For long- and mid-term use
- Lifespan average 12 months Indoor, 6 months outdoor
- Effortless, bubble-free application with its unique air channel structure
- Nearly invisible dot pattern once applied
- Residue-free, washable, reusable, recyclable


Formats and printing compatibility

Material for printing test available upon request.

PRODUCT	PRINTING	APPEARANCE	SHEETS	REELS
Offset	Offset (traditional & UV)	White	707 x 1000	
Dry Toner	Dry Toner, Laser	White	320 x 450	
Large Format	UV-inkjet, Latex, Eco-solvent, UV-LED, UV-gel	White		1370 x 30 1370 x 100

Recommended applications

- Ideal for easy and bubble-free installation, including larger window graphics.
- Great for retail advertising, events and exhibitions requiring the most pristine print quality.
- Designed for applications and uses such as healthcare, pharmaceuticals, food, beverages, promotional items and stickers.

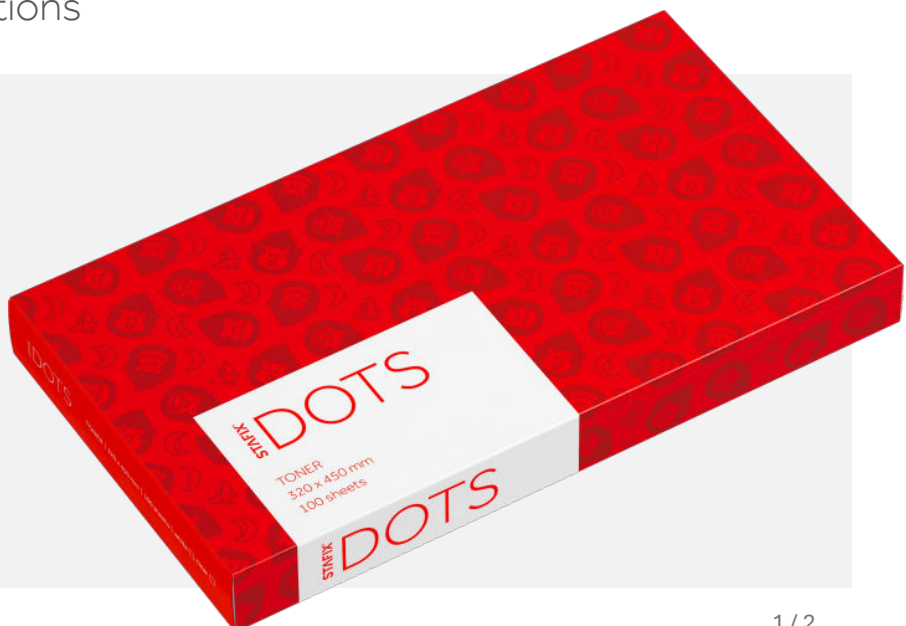

Sheets product data



	OFFSET		DRY TONER	
	Film	Backer	Film	Backer
Weight (g/m ²)	125	45	145	70
Thickness (mm)	0.190	0.050	0.115	0.050
Total Weight (g/m ²)	170		215	
Total Thickness (mm)	0.240		0.165	
Film	PP		PET	
Backer	PP		PET	

Large Format product data



UV-INKJET, LATEX, ECO-SOLVENT

MATERIAL	White	
	Film	Backer
Weight (g/m ²)	125	45
Thickness (mm)	0.190	0.050
Total Weight (g/m ²)	170	
Total Thickness (mm)	0.240	
REELS		
Reel Length (m)	30	100
Reel Width (mm)	137	
Reel Diameter (cm)	128	196
Core (mm)	76,2 (3")	
Reel Weight (kg)	10	28
Film	PP	
Backer	PP	

For expert printing tips and more, please visit Stafix website at www.stafix.eu

Important: All information concerning Stafix® products is based on current quality levels. Stafix Ltd. reserves the right to change the specifications of the contents as part of our continual product development. Before using the material, the end user must analyze the suitability of the material for the specific application. Stafix Ltd. does not assume liability for the unsuitable performance of the material.

Stafix Ltd
Konttisentie 8B
40800 Vaajakoski
Finland

info@stafix.fi
www.stafix.eu
VAT: FI20849407

Recyclability:

PP: Grade 5 plastic
PET: Grade 1 plastic

Shelf life:

12 months

Usage:

Before applying the material, the surface must be clean, dry and grease-free.